

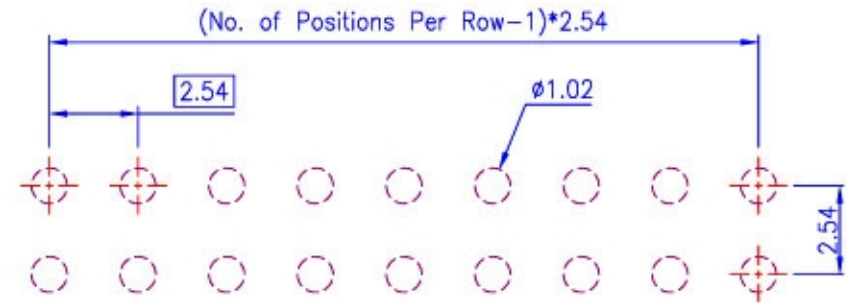
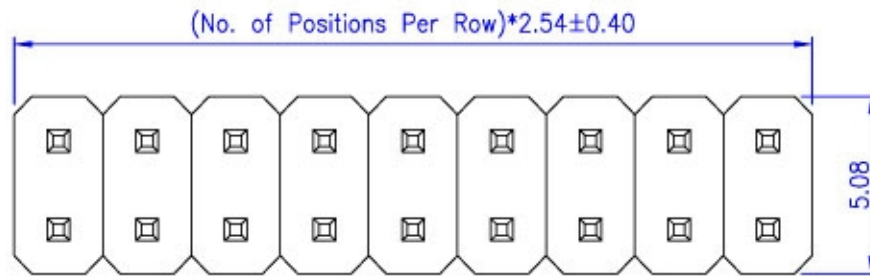


Rev.	Date	Description
A	2004/10/11	New Drawing

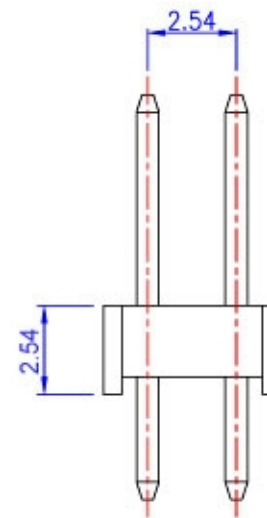

PCB Layout
(Top View)

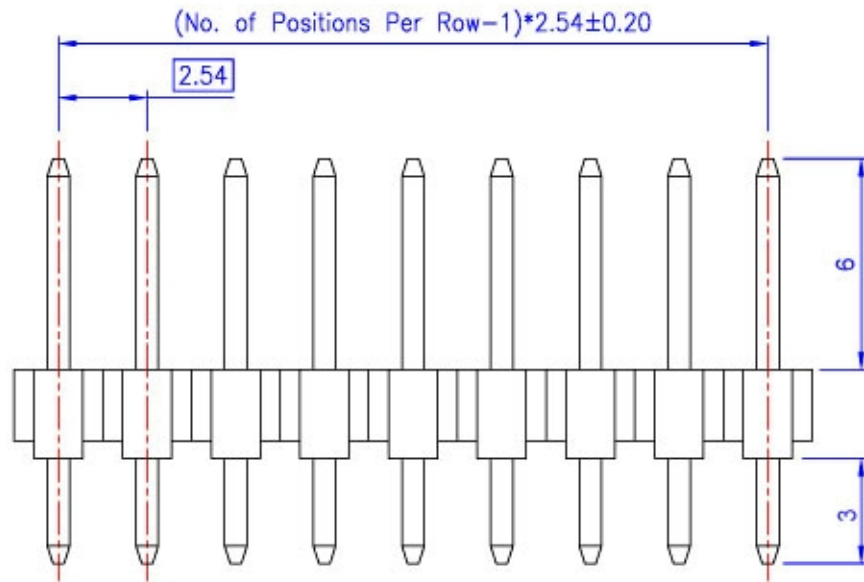

cypax
www.cypax.dk
mail@cypax.com

Industrivej 24
DK-7470 Karup
Tlf. +45-9710 1188

Housing : Nylon6T

Shallin Electronics Co., Ltd.

Material and Finish

1. Housing: Thermoplastic (UL94V-0), Black.
2. Terminal: Sq. 0.64mm Copper Alloy, Gold Plating.

Electrical Characteristics

1. Current Rating: 3.0 Amp. Max.
2. Dielectric Withstand Voltage: 1000V AC RMS for 60Seconds.
3. Insulation Resistance: 1000M Ohms Min. at 1000V DC.

Mechanical Characteristics

1. Operating Temperature: -55°C ~ +105°C

Tolerance	Scale	Unit	Drawn By	Checked By	Approved By
0.0 ±0.30	1:1	mm	Nasoi	Scott	Alex
0.00 ±0.20					
0.000 ±0.10					
Drawing No. YWNxx series					
Title: 2.54mm Post Header PCB Mount Vertical Dual Rows					